

DRAFT
PRELIMINARY ENGINEERING REPORT - website volume 1 of 3

Florida Department of Transportation
District Five
State Road 524 Project Development and Environment (PD&E) Study
Limits of Project: From Friday Road to Industry Road
Brevard County, Florida
Financial Management Number: 437983-1
Federal Aid Project No.: D518-034-B
ETDM Number: 14321
Date: June 2025

The environmental review, consultation, and other actions required by applicable federal environmental laws for this project are being, or have been, carried out by the Florida Department of Transportation (FDOT) pursuant to 23 U.S.C. §327 and a Memorandum of Understanding dated May 26, 2022, and executed by the Federal Highway Administration and FDOT.

Draft

Table of Contents

1.	PROJECT SUMMARY.....	1-1
1.1	Project Description.....	1-1
1.2	Purpose and Need.....	1-1
1.2.1	Project Status	1-2
1.2.2	Roadway Capacity	1-3
1.2.3	Safety.....	1-3
1.3	Commitments.....	1-3
1.4	Alternative Analysis Summary	1-4
1.5	Description of Preferred Alternative.....	1-5
1.6	List of Technical Reports Completed for the Project	1-7
1.6.1	Engineering Reports.....	1-7
1.6.2	Environmental Reports	1-7
1.6.3	Public Involvement Items.....	1-7
2.	EXISTING CONDITIONS.....	2-1
2.1	Previous Planning Studies	2-1
2.2	Existing Roadway Network.....	2-3
2.3	Typical Sections.....	2-3
2.4	Right-of-Way	2-7
2.5	Pavement Type and Conditions	2-7
2.6	Roadway Classification.....	2-8
2.7	Adjacent Land Use.....	2-8
2.8	Access Management Classification	2-14
2.9	Design and Posted Speeds	2-14
2.10	Horizontal and Vertical Alignments	2-14
2.11	Pedestrian Accommodations	2-15
2.12	Bicycle Facilities.....	2-15
2.13	Transit Facilities.....	2-15
2.14	Existing Intersections and Traffic Signals	2-15
2.15	Railroad Crossings	2-16
2.16	Physical or Operational Restrictions	2-16
2.17	Traffic Data and Roadway Operational conditions	2-16
2.17.1	Traffic Data.....	2-16
2.17.2	Roadway Operational Conditions	Error! Bookmark not defined.
2.18	Crash Data and Safety Analysis	2-20
2.19	Managed Lanes	2-22
2.20	Drainage and Floodplains.....	2-22
2.21	Soils and Geotechnical Data.....	2-23
2.22	Utilities	2-28
2.23	Lighting.....	2-28
2.24	Aesthetic Features	2-28
2.25	Existing ITS Infrastructure	2-30
2.26	Traffic Signs	2-30
2.27	Existing Structures.....	2-32
2.28	Noise and Perimeter Walls.....	2-34
2.29	Existing Environmental Features.....	2-34
2.29.1	Cultural Features and Community Facilities	2-34
2.29.2	Archaeological and Historical Sites	2-35

Draft

2.29.3	Wetlands and Surface Water	2-35
2.29.4	Protected Species.....	2-36
2.29.5	Farmland	2-37
2.29.6	Noise Sensitive Sites.....	2-37
2.29.7	Contamination	2-38
3.	FUTURE CONDITIONS	3-1
3.1	Future Land Use	3-1
3.2	Roadway Context Classification	3-1
3.3	Future Traffic Volumes.....	3-1
3.4	Future No Build Conditions	3-1
3.5	Future Build Conditions.....	3-3
4.	DESIGN CONTROL AND CRITERIA	4-1
4.1	Roadway Design Criteria	4-1
4.2	Drainage Design Criteria	4-1
5.	ALTERNATIVES ANALYSIS	5-3
5.1	No-Build (No-Action) Alternative	5-3
5.2	Transportation Systems Management and Operations Alternative.....	5-3
5.2.1	Existing TSM&O Deployments	5-4
5.2.2	TSM&O Recommendations.....	5-4
5.3	Multimodal Alternatives	5-4
5.4	Build Alternatives	5-5
5.4.1	Roadway Typical Sections	5-5
5.4.2	Bridge Typical Sections.....	5-8
5.5	Horizontal and Vertical Alignment	5-9
5.5.1	Horizontal Alignment	5-9
5.5.2	Vertical Alignment.....	5-9
5.6	Interchange and Intersection Build Alternatives	5-10
5.6.1	I-95 Interchange	5-10
5.6.2	I-95 Bridges	5-13
5.6.3	Cox Road	5-14
5.6.4	London Boulevard	5-16
5.6.5	Cirrus Drive.....	5-18
5.6.6	Industry Road	5-19
5.7	Comparative Evaluation	5-20
5.8	Value Engineering (VE) Study Resolutions	5-25
5.9	Selection of Preferred Alternative	5-26
6.	AGENCY COORDINATION AND PUBLIC INVOLVEMENT	6-1
6.1	Public Website.....	6-1
6.2	Public Involvement.....	6-1
6.2.1	Project Kickoff Notification Letter.....	6-1
6.2.2	Alternatives Public Meeting.....	6-1
6.2.3	Public Hearing	6-2
6.3	Stakeholder Meetings	6-2
7.	PREFERRED ALTERNATIVE.....	7-1
7.1	Typical Sections	7-1
7.2	Right-of-Way and Relocations.....	7-3
7.3	Horizontal and Vertical Geometry	7-4

7.4	Design Exceptions / Variations.....	7-5
7.5	Multi-Modal Accommodations	7-5
7.6	Access Management	7-6
7.7	Intersection Concepts and Signal Analysis	7-8
7.8	Tolled Projects.....	7-19
7.9	ITS and TSM&O Strategies	7-20
7.10	Landscaping.....	7-20
7.11	Lighting.....	7-20
7.12	Wildlife Crossings	7-20
7.13	Utility Impacts	7-23
7.14	Drainage and Stormwater Management Facilities	7-23
7.15	Floodplain Analysis.....	7-24
7.16	Permits	7-25
7.17	Bridge and Structure Analysis	7-25
7.18	Transportation Management Plan	7-26
7.19	Constructability.....	7-26
7.20	Construction Impacts	7-27
7.21	Special Features	7-27
7.22	Cost Estimates.....	7-28
7.23	Summary of Environmental Impacts of the Preferred Alternative	7-29
7.23.1	Future Land Use	7-29
7.23.2	Farmlands.....	7-29
7.23.3	Section 4(f)	7-30
7.23.4	Cultural Resources	7-30
7.23.5	Wetlands	7-30
7.23.6	Protected Species and Habitat.....	7-31
7.23.7	Essential Fish Habitat	7-31
7.23.8	Highway Traffic Noise	7-31
7.23.9	Contamination	7-31

List of Figures

Figure 1-1 Project Location Map	1-2
Figure 1-2 Project Segmentation Map	1-5
Figure 2-1 Existing SR 524 Typical Sections Map.....	2-4
Figure 2-2 Existing SR 524 Typical Sections	2-5
Figure 2-3 Existing SR 524 Typical Sections	2-6
Figure 2-4 Existing I-95 Typical Section	2-7
Figure 2-5 Existing Land Use Maps.....	2-9
Figure 2-6 Existing Land Use Maps.....	2-10
Figure 2-7 Existing Land Use Maps.....	2-11
Figure 2-8 Existing Land Use Maps.....	2-12
Figure 2-9 Existing Land Use Maps.....	2-13
Figure 2-10 Existing Annual Average Daily Traffic.....	2-17
Figure 2-11 Existing Peak Hour Turning Movement Volumes.....	2-18
Figure 2-12 USDA Soil Classification Map.....	2-24
Figure 2-13 USDA Soil Classification Map.....	2-25
Figure 2-14 USDA Soil Classification Map.....	2-26
Figure 2-15 USDA Soil Classification Map.....	2-27
Figure 2-16 Existing ITS Infrastructure	2-31
Figure 2-17 Southbound I-95 Off Ramp Exit Sign	2-32
Figure 2-18 Northbound I-95 Off Ramp Exit Sign	2-32
Figure 2-19 Potential Contamination Sites.....	2-39
Figure 3-1 Future Land Use Map – City of Cocoa	3-2
Figure 3-2 Future Land Use Map – Brevard County	3-3
Figure 3-3 Future No-Build Average Annual Daily Traffic.....	3-4
Figure 3-4 Future Build Average Annual Daily Traffic	3-5
Figure 3-5 Year 2045 No-Build Peak Hour Turning Movement.....	3-6
Figure 3-6 Year 2045 Build Peak Hour Turning Movement.....	3-7
Figure 3-7 Year 2045 Initial Build Intersection Geometry.....	3-4
Figure 3-8 Year 2045 DDI Intersection Geometry	3-2
Figure 5-1 Project Segment Map.....	5-5
Figure 5-2 Curbed Alternative Typical Section	5-6
Figure 5-3 High Speed Curbed Alternative Typical Section	5-7
Figure 5-4 Flush Shoulder Alternative Typical Section	5-8
Figure 5-5 Proposed I-95 Bridge Typical Section	5-8
Figure 5-6 Standard Diverging Diamond Interchange Diagram	5-11
Figure 5-7 Modified Diamond Interchange Alternative	5-12
Figure 5-8 Diverging Diamond Interchange (DDI) Alternative	5-12
Figure 5-9 Cirrus Drive (Signalized Alternative).....	5-18
Figure 7-1 Segment 1 Typical Section (Friday Road (South) to Friday Road (North))	7-2
Figure 7-2 Segment 2 Typical Section (Friday Road (North) to Cox Road)	7-2
Figure 7-3 Segment 3 Typical Section (Cox Road to London Boulevard)	7-2
Figure 7-4 Segment 4 Typical Section (London Boulevard to Industry Road)	7-3
Figure 7-5 I-95 Bridge Typical Section	7-3
Figure 7-6 Friday Road (South) Intersection.....	7-9
Figure 7-7 Friday Road (North) Intersection.....	7-10
Figure 7-8 Walmart Distribution Intersection	7-11
Figure 7-9 Cox Road Roundabout.....	7-12
Figure 7-10 Pinyon Drive Intersection.....	7-13

Figure 7-11 Westminster Drive Intersection	7-14
Figure 7-12 Lance Boulevard Intersection.....	7-14
Figure 7-13 London Boulevard Roundabout	7-15
Figure 7-14 Coventry Court Intersection.....	7-16
Figure 7-15 Cirrus Drive Intersection	7-17
Figure 7-16 Industry Road Intersection.....	7-18
Figure 7-17 I-95 Interchange	7-19
Figure 7-18 Proposed ITS Improvement.....	7-21
Figure 7-19 Potential Diversion Routes.....	7-22
Figure 7-20 Proposed I-95 Bridge over SR 524.....	7-26

List of Tables

Table 1-1 Context Classification	1-4
Table 2-1 Pavement Condition Survey Results.....	2-8
Table 2-2 Existing Access Management Classification	2-14
Table 2-3 Existing Horizontal Curve Data	2-15
Table 2-4 Intersections	2-16
Table 2-5 Existing Year 2019 Intersection LOS Analysis Summary.....	2-19
Table 2-6 Existing Year 2019 Arterial LOS Analysis Summary	2-20
Table 2-7 Crash Summary by Intersections (Jan 2019 – Dec 2023)	2-20
Table 2-8 Crash Summary by Crash Types (Jan 2019 – Dec 2023)	2-21
Table 2-9 Summary of Existing Cross Drains	2-22
Table 2-10 Soil Classification	2-23
Table 2-11 Existing Utility Owners.....	2-28
Table 2-12 Description of Existing Utilities.....	2-29
Table 2-13 Existing Bridges.....	2-33
Table 2-14 Protected Wildlife Species.....	2-36
Table 2-15 Protected Plant Species.....	2-37
Table 2-16 Summary of Potential Site Contaminations	2-38
Table 3-1 Design Year 2045 No Build Intersection LOS Analysis Summary.....	3-2
Table 3-2 Design Year 2045 No Build Arterial LOS Analysis Summary	3-2
Table 3-3 Design Year 2045 Build Intersection LOS Analysis Summary	3-3
Table 3-4 Design Year 2045 Build Arterial LOS Analysis Summary.....	3-1
Table 3-5 Design Year 2045 Build DDI Intersection LOS Analysis Summary	3-1
Table 3-6 Design Year 2045 Build Roundabout LOS Analysis Summary.....	3-3
Table 4-1 SR 524 Design Criteria	4-1
Table 4-2 I-95 Design Criteria	4-2
Table 5-1 Bridge Alternative Costs	5-14
Table 5-2 Cox Road ICE Operation Analysis Summary	5-16
Table 5-3 Cox Road ICE Costs Summary	5-16
Table 5-4 London Boulevard ICE Operation Analysis Summary.....	5-17
Table 5-5 London Boulevard ICE Costs Summary.....	5-18
Table 5-6 Industry Road ICE Operation Analysis Summary.....	5-20
Table 5-7 Industry Road ICE Costs Summary.....	5-20
Table 5-8 Segment 1 Evaluation Matrix	5-21
Table 5-9 Segment 2 Evaluation Matrix	5-22
Table 5-10 Segment 3 Evaluation Matrix	5-23
Table 5-11 Segment 4 Evaluation Matrix	5-24

Table 5-12 VE Study Summary	5-25
Table 5-13 Preferred Alternative Recommendations	5-27
Table 7-1 Parcel Impacts	7-4
Table 7-2 Preferred Alternative Horizontal Alignment Curve Data.....	7-5
Table 7-3 Design Criteria Satisfaction.....	7-5
Table 7-4 SR 524 Median Types and Spacing	7-6
Table 7-5 SR 524 Intersection Spacing	7-7
Table 7-6 SR 524 Roadway Connection Spacing.....	7-7
Table 7-7 Summary of Preferred Stormwater Pond Sites	7-24
Table 7-8 Summary of Cross Drains.....	7-24
Table 7-9 Anticipated Permits	7-25
Table 7-10 Noise Barrier Analysis.....	7-28
Table 7-11 Estimated Project Costs.....	7-29

List of Appendices

Appendix A - INTERSECTION ALTERNATIVE ANALYSIS CONCEPT PLANS

Appendix B - TYPICAL SECTION PACKAGE

Appendix C – PREFERRED ALTERNATIVE CONCEPT PLANS

Appendix D - PARCEL IMPACT EXHIBITS


Appendix E - SUMMARY OF COST FOR BUILD ALTERNATIVES

Appendix F – EXISTING DRAINAGE AND FLOODPLAIN MAPS

Appendix F – EXISTING DRAINAGE AND FLOODPLAIN MAPS

Draft

SR 524 PD&E Topo Map

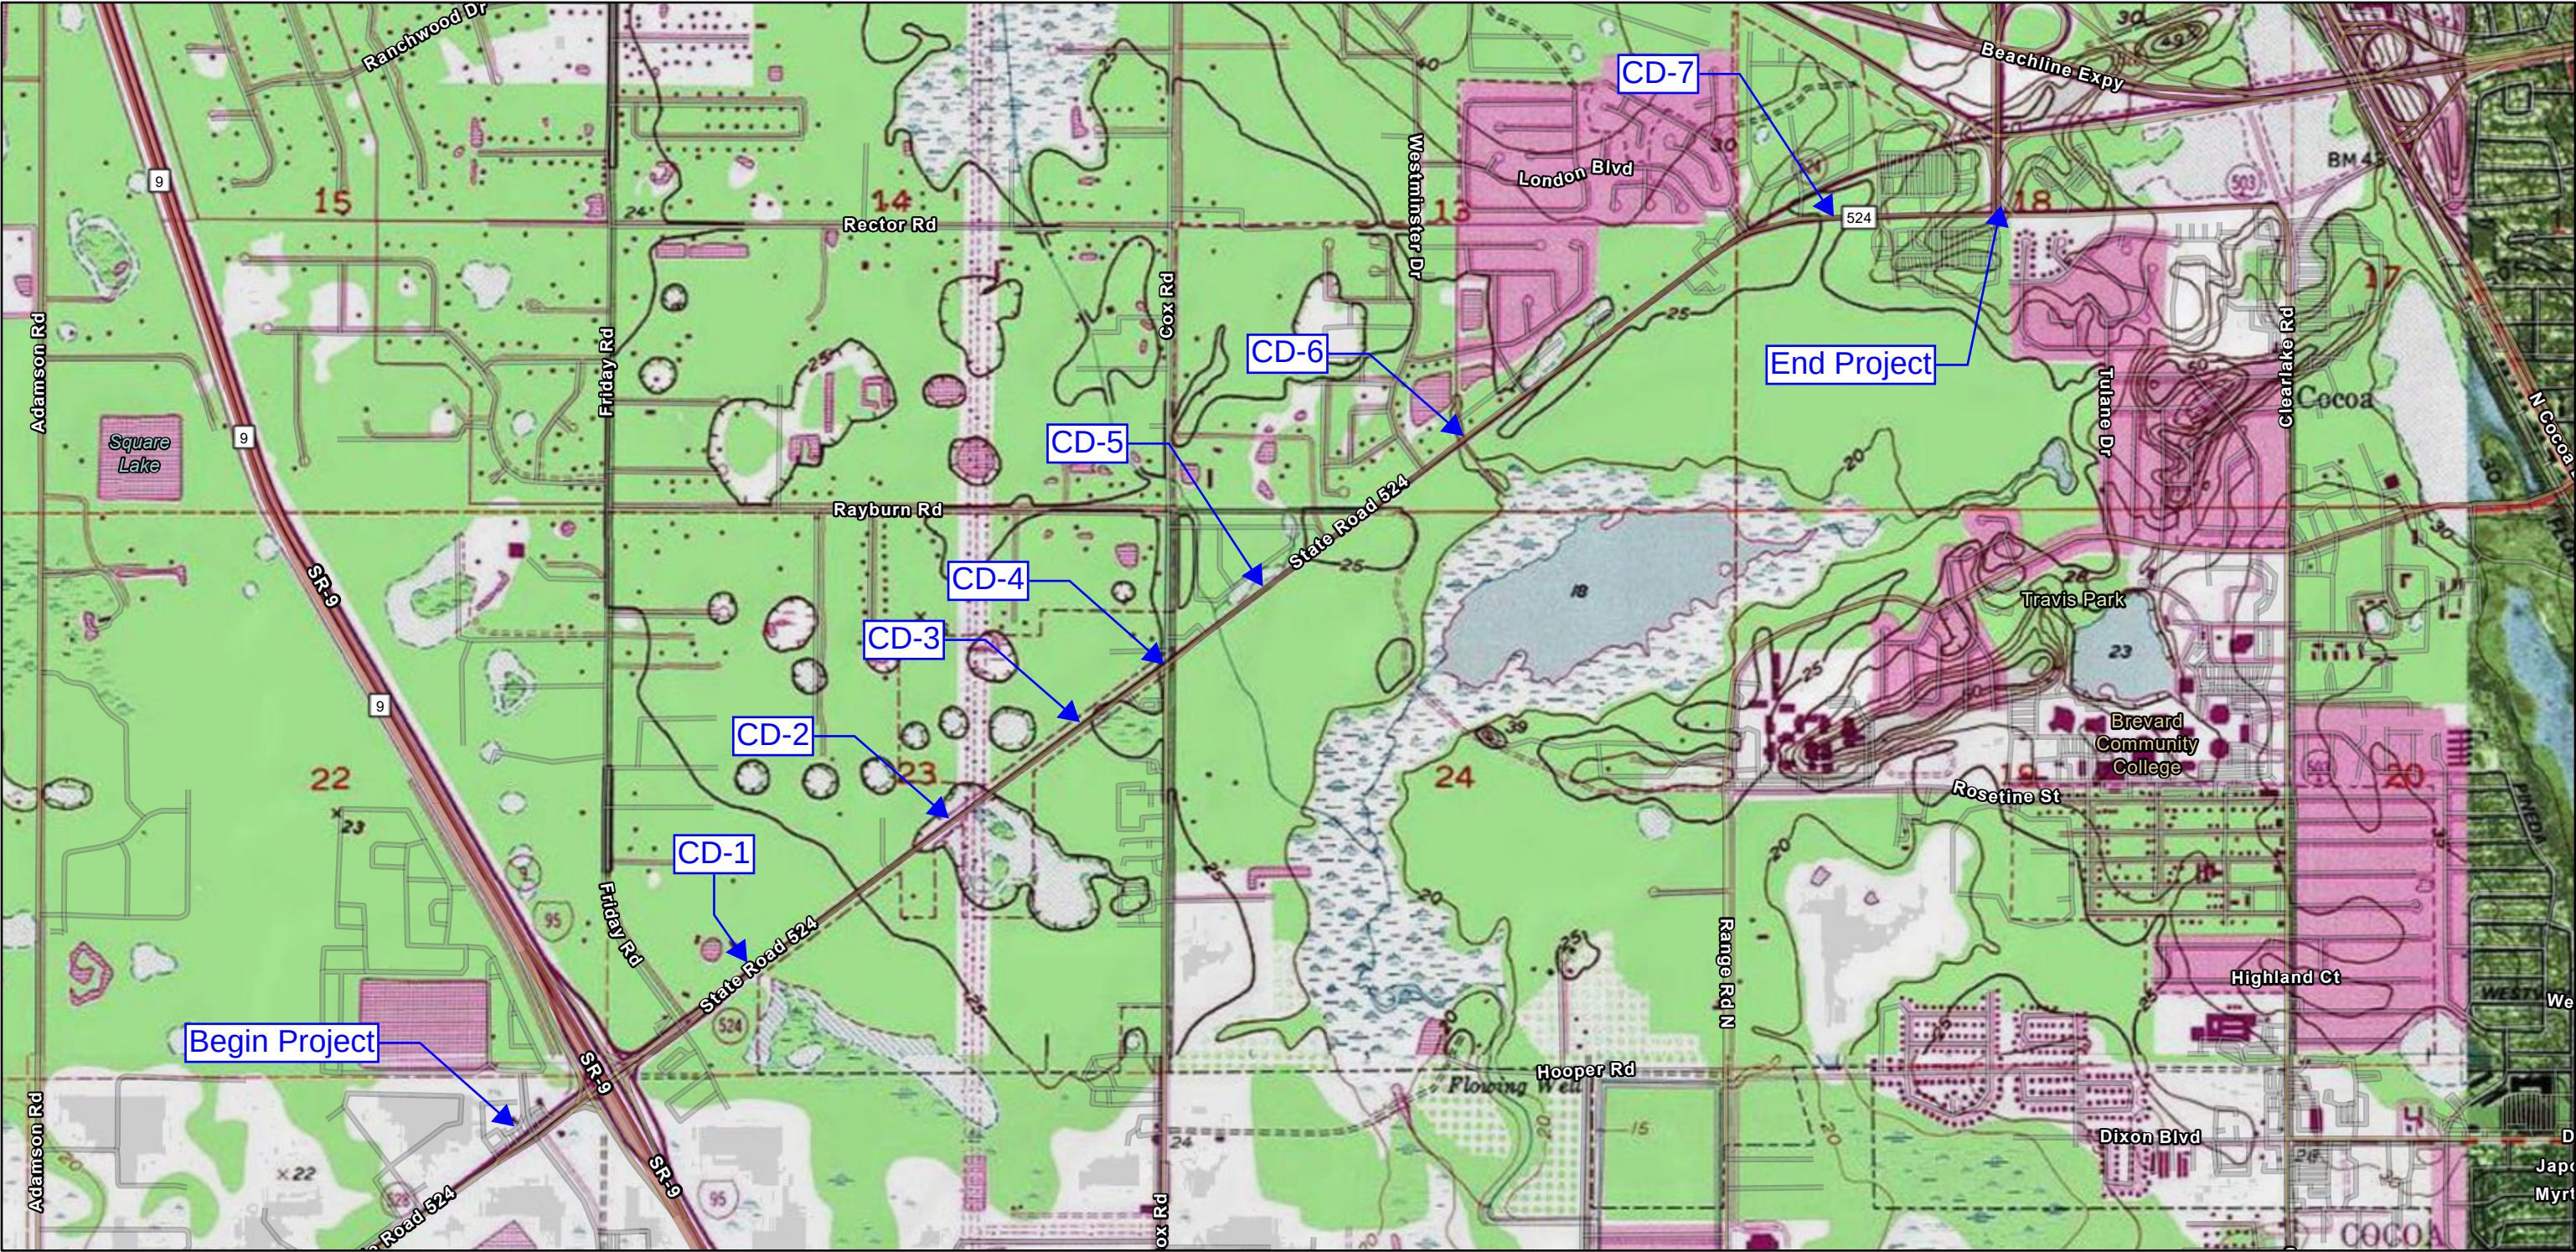


8/9/2022

- USA Topo Maps
- World Imagery
- Low Resolution 15m Imagery

- High Resolution 60cm Imagery
- High Resolution 30cm Imagery
- Citations

4.8m Resolution Metadata
DATUM: NAD27



State of Florida, Maxar, Copyright:© 2013 National Geographic Society, i-cubed, FDEP, Esri, HERE, Garmin, SafeGraph, GeoTechnologies, Inc, METI/NASA, USGS, EPA, NPS, US Census Bureau, USDA

<https://www.arcgis.com/apps/mapviewer/index.html?layers=99cd5fbd98934028802b4f797c4b1732>

Draft

9/1/2022 6:46:46 PM mlfischl
P:_V-TPD\Design\CADD_FDOT\Worksets\FDOT\43798312201\drainage\DRMPRD12_Floodplain.dgn



REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION


CONSOR ENGINEERS, LLC
MELINDA S. FISCHL, P.E. - No. 68406
1511 East SR 434, Suite 1001
Winter Springs, Florida 3278
Ph: 407.957.1660
Fax: 407.957.8744

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION		
ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 524	BREVARD	43798312201

FLOODPLAIN EXHIBIT

SHEET NO.
A-2

9/1/2022 6:59:09 PM mlfischl
P:_V-TPD\Design\CADD_FDOT\Worksets\FDOT\43798312201\drainage\DRMPRD12_Floodplain.dgn

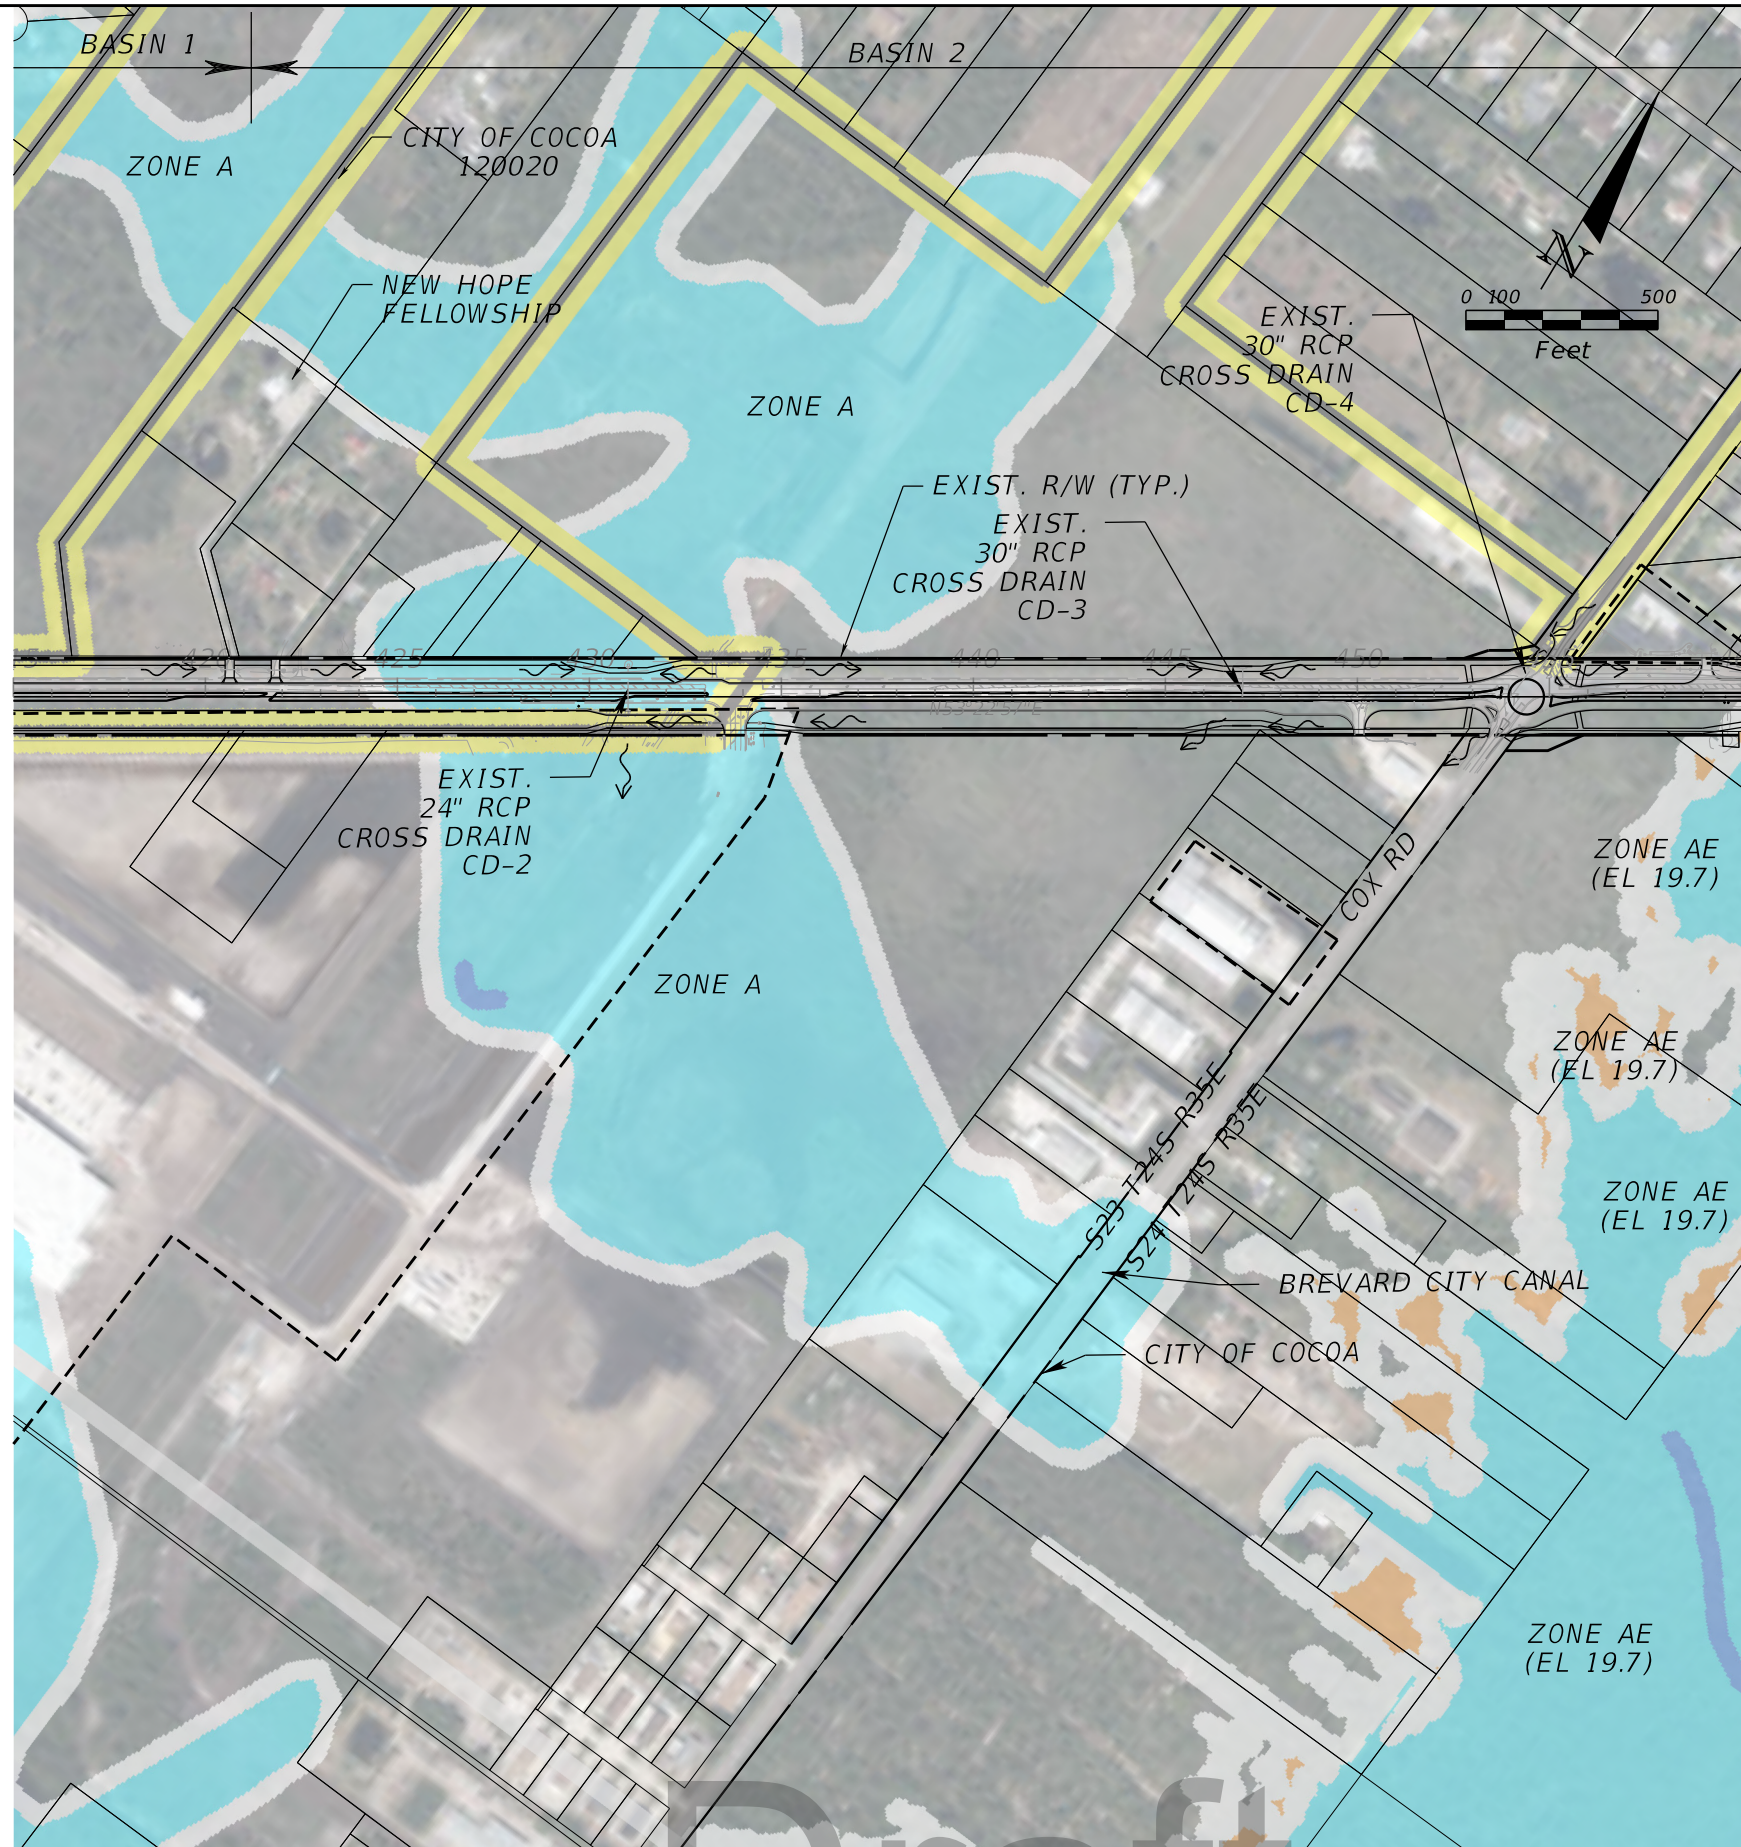

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION

CONSOR ENGINEERS, LLC
MELINDA S. FISCHL, P.E. - No. 68406
1511 East SR 434, Suite 1001
Winter Springs, Florida 3278
Ph: 407.957.1660
Fax: 407.957.8744


STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 524	BREVARD	43798312201

FLOODPLAIN EXHIBIT

SHEET
NO.

A-3

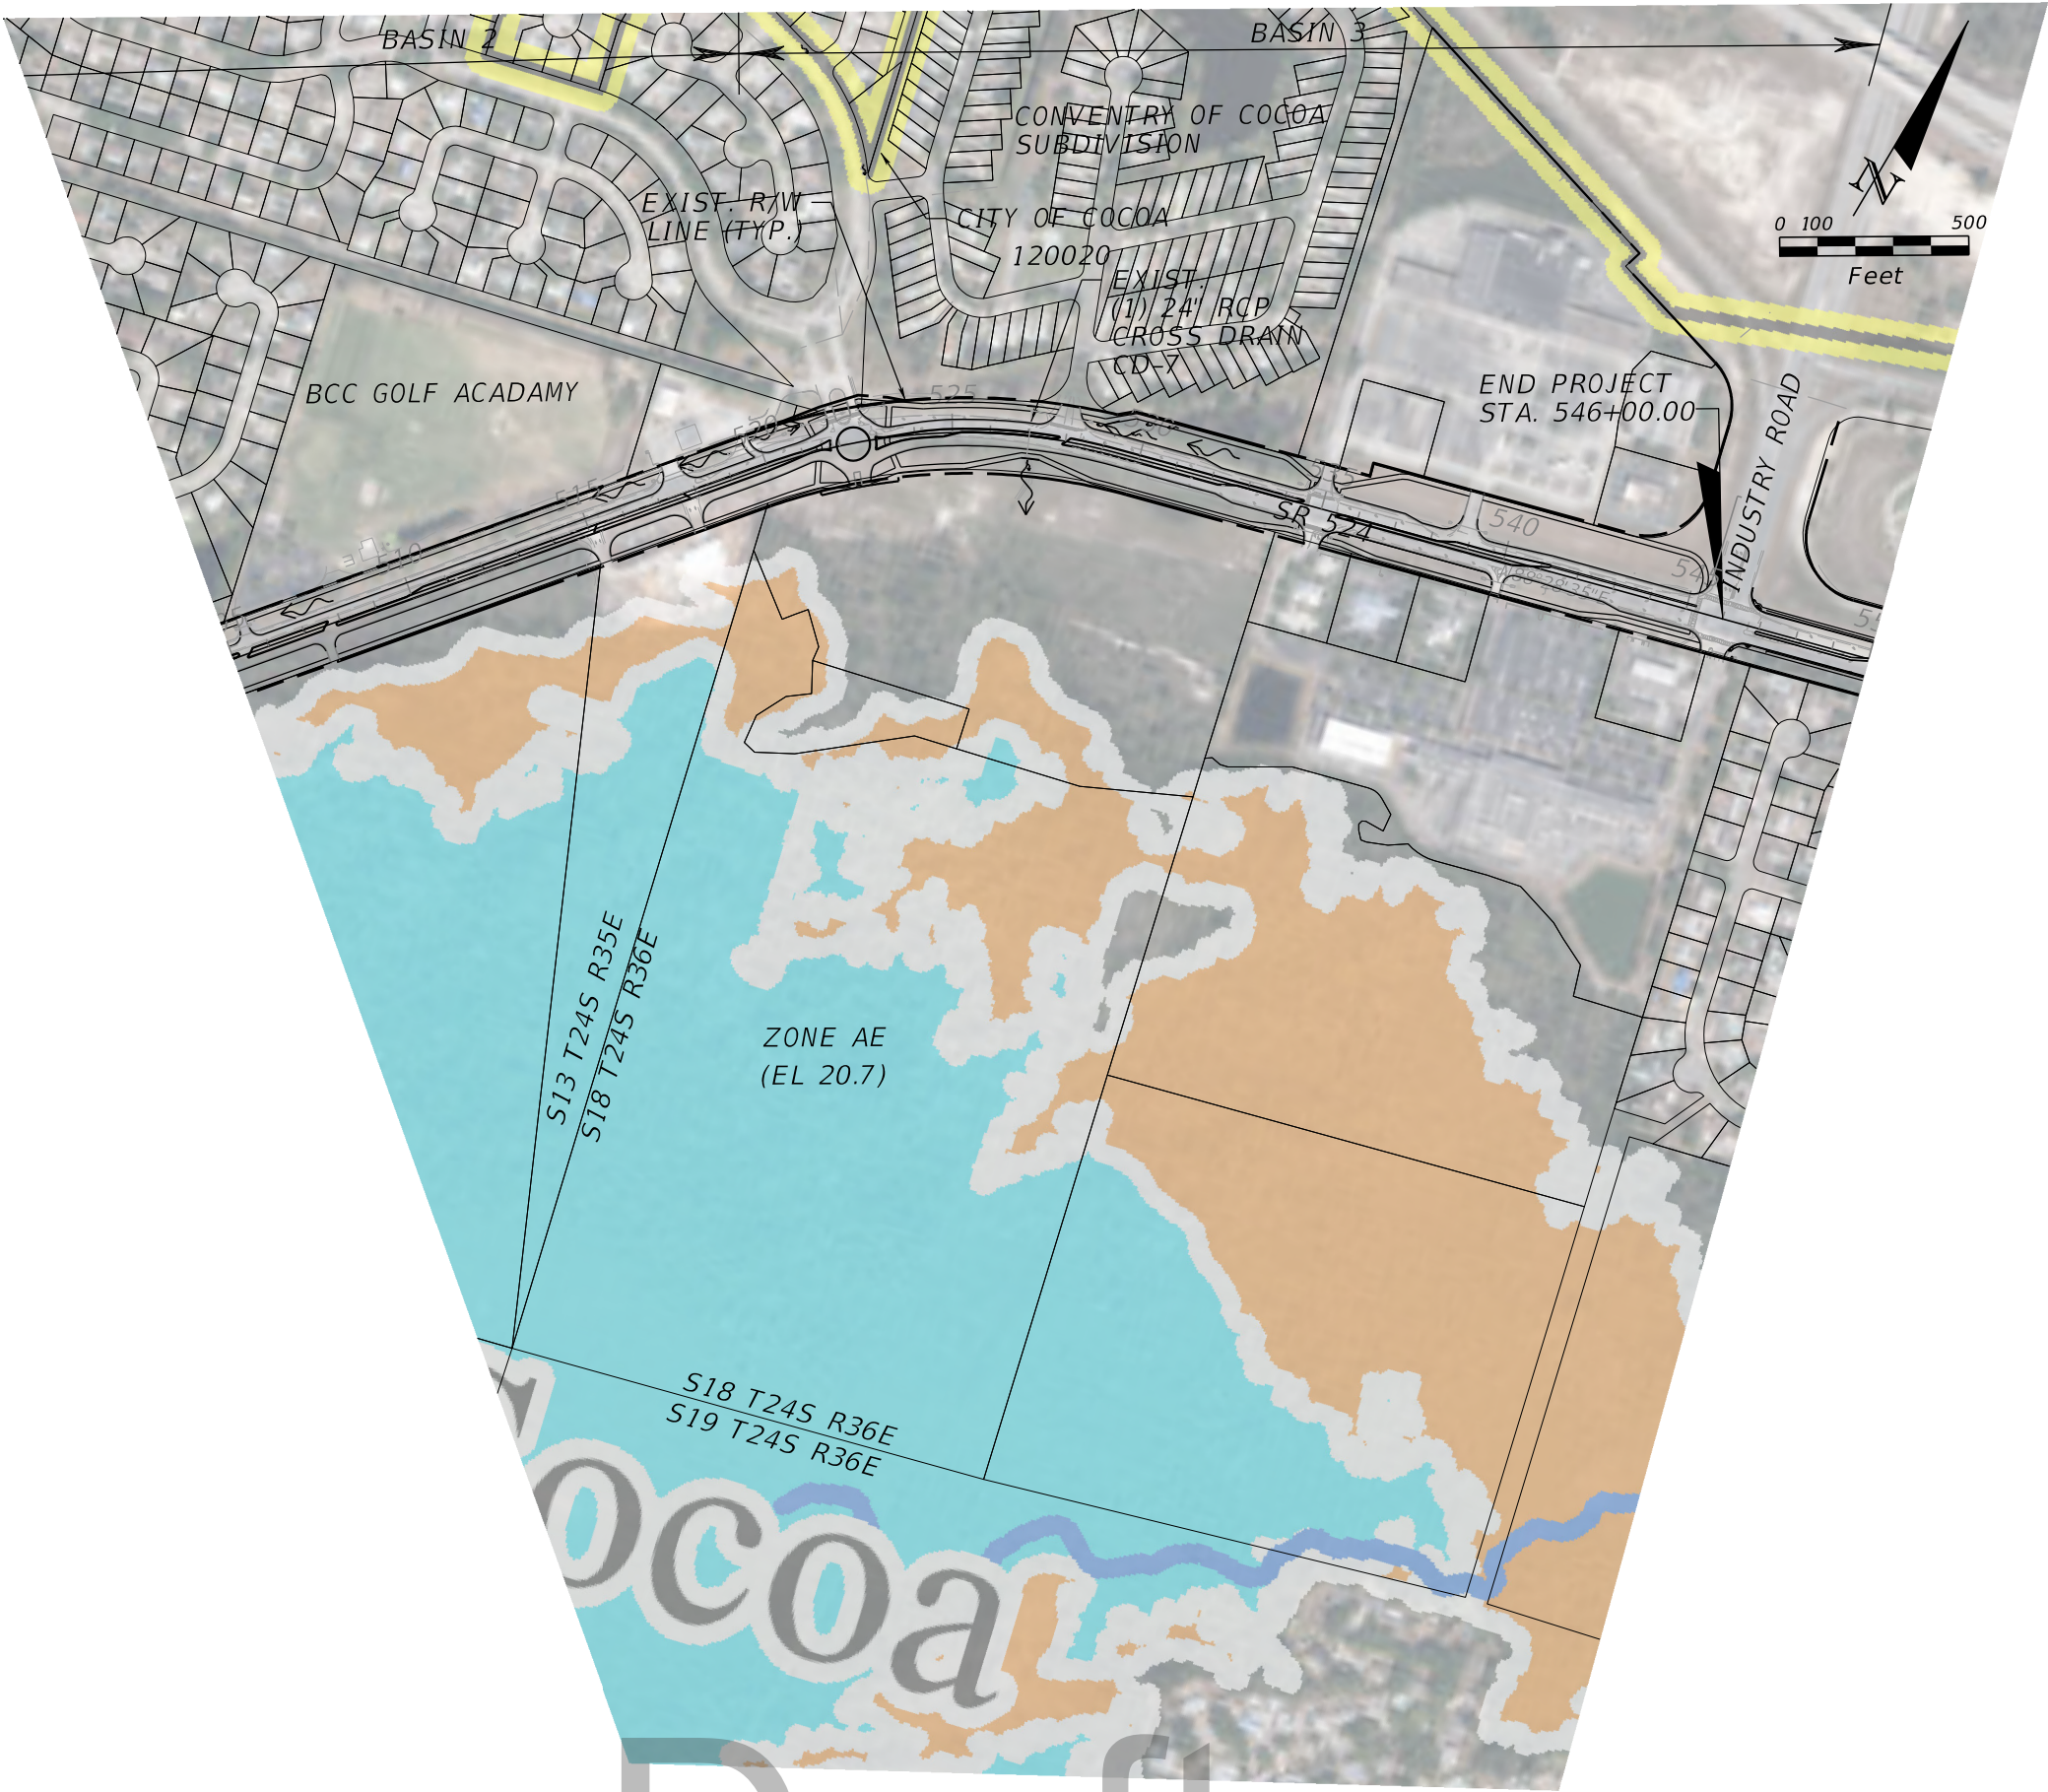

9/1/2022 7:12:51 PM mlfischl
P:_V-TPD\Design\CADD_FDOT\Worksets\FDOT\43798312201\drainage\DRMPRD12_Floodplain.dgn

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION

CONSOR ENGINEERS, LLC
MELINDA S. FISCHL, P.E. - No. 68406
1511 East SR 434, Suite 1001
Winter Springs, Florida 3278
Ph: 407.957.1660
Fax: 407.957.8744

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION		
ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 524	BREVARD	43798312201

FLOODPLAIN EXHIBIT

SHEET NO.
A-5